


Instructions for positioning 2 part Cross Strips Cladding during installation:

Important! Due to subtle potential shifting during drying or packaging, occasionally product requires subtle loosening of the stone against the mesh to insure tight interlock with matching pair. To do this, take product in both hands, subtly bend pieces away from each other and jiggle pieces against each other to loosen mesh as needed.


Cross Strips have both A & B tiles that are designed to interlock into each other as a “tile set”. When placed in the correct position the 2 parts fit at a 120 degree angle from each other.

*While Cross Strips can be laid in any number of directions, these instructions outline how to achieve a popular vertical direction layout


1. Precut the 2 pieces “tile set” as shown. (You may want to precut multiple sets as needed for the project)

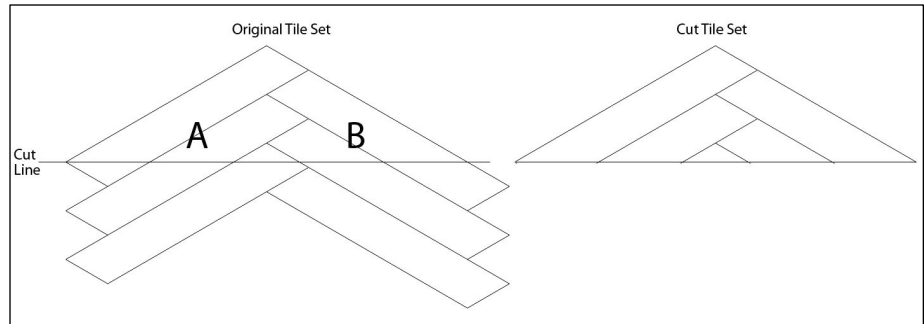


2. Once the surface is ready for the tile to be applied (follow standard instructions for installing stone tile), determine a horizontal line (often the base or edge of the install surface). Place the “cut tile set” on the edge as shown.

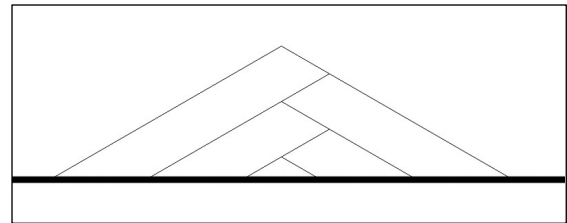

3. Take a full tile set and place on top of the cut tile set as shown

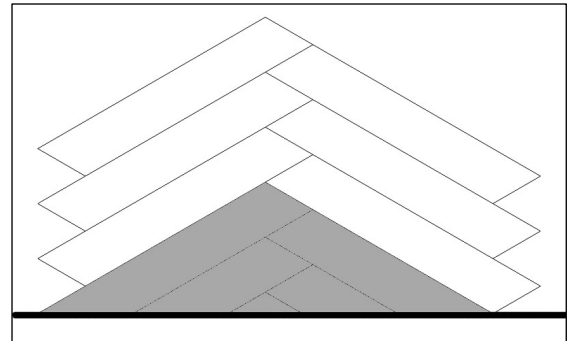

4. Repeat steps 2&3 outward the full length of the edge chosen as shown. Subsequent sets should interlock into existing sets as shown in diagram.

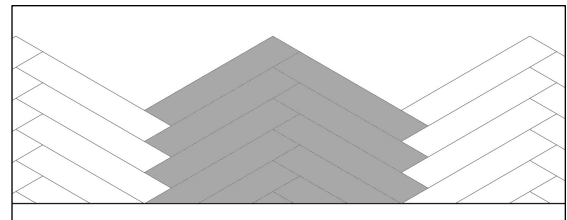

5. Place subsequent sets above existing sets to complete installation.

